


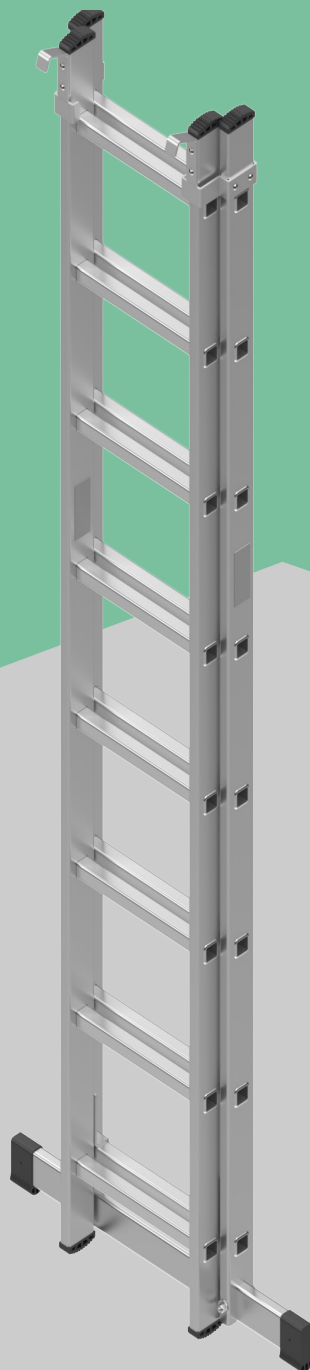

PRODUCT SHEET
HAND LADDERS AND
ACCESORY EQUIPMENT

INDEX

SIMPLE LADDER	3
INTRODUCTION	3
MODELS AND DIMENSIONS	3
TWO-SECTION EXTENSION LADDER	4
INTRODUCTION	4
MODELS AND DIMENSIONS	4
ACCESS ACCESSORIES - EXIT BARS	5

SIMPLE LADDER

INTRODUCTION


The multipurpose ladders are used for professional occasional use. They are manufactured with reinforced profiles.

- Material: aluminium 6063 T5
- Components: Uprights: 65 × 24 mm
- Anti-slip rungs: 30 × 30 mm crimped
- Centre distance between rungs: 280 mm
- Standard: NF EN 131-1, 131-2

MODELS AND DIMENSIONS

MULTIPURPOSE LADDER

Ref.	Length / Wide	Rungs	Weight
038384	1,720 mm / 350 mm	6	4,18 kg
038089	2,000 mm / 350 mm	7	4,8 kg
038385	2,280 mm / 350 mm	8	5 kg
038386	2,560 mm / 350 mm	9	5,3 kg
038387	2,840 mm / 350 mm	10	5,93 kg
038388	3,120 mm / 350 mm	11	8,48 kg
038390	3,680 mm / 450 mm	13	10 kg
038391	3,960 mm / 450 mm	14	10,5 kg
038392	4,240 mm / 450 mm	15	11 kg
038393	4,520 mm / 450 mm	16	12 kg

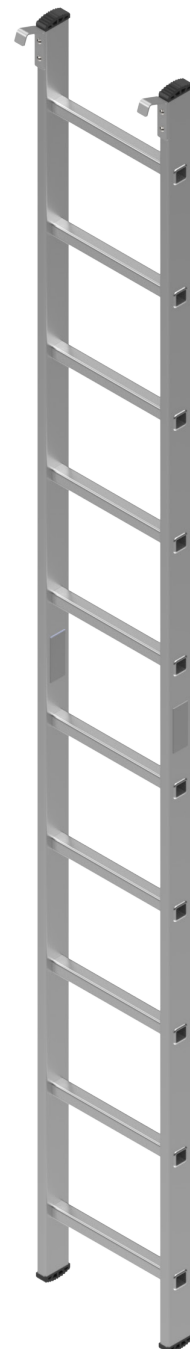

MULTIPURPOSE EXTENDABLE LADDER (TWO-SECTION EXTENSION)


INTRODUCTION

The multipurpose extendable ladder is easy to install for short interventions. It is used to access lifts or roofs for carrying out maintenance procedures. It allows access for maintenance of lifts and access to the roof from the stairwells.

- Material: aluminium 6063 T5
- Components: Uprights: 65 × 24 mm
- Anti-slip rungs: 30 × 30 mm crimped
- Hook for beam: Ø30 mm section max
- Centre distance between rungs: 280 mm
- Integrated blocking system
- Standard: NF EN 131-1, 131-2

MODELS AND DIMENSIONS

Ref.	Folded length	Unfolded length	Rungs	Weight
36094	1,720 mm	2,521 mm	6	7 kg
36095	2,000 mm	3,081 mm	7	8 kg
35614	2,280 mm	3,641 mm	8	8,58 kg
35617	2,560 mm	4,201 mm	9	10 kg
35612	2,840 mm	4,741 mm	10	10,45 kg
33605	3,120 mm	5, 321 mm	11	12 kg
35620	3,400 mm	5, 881 mm	12	13 kg



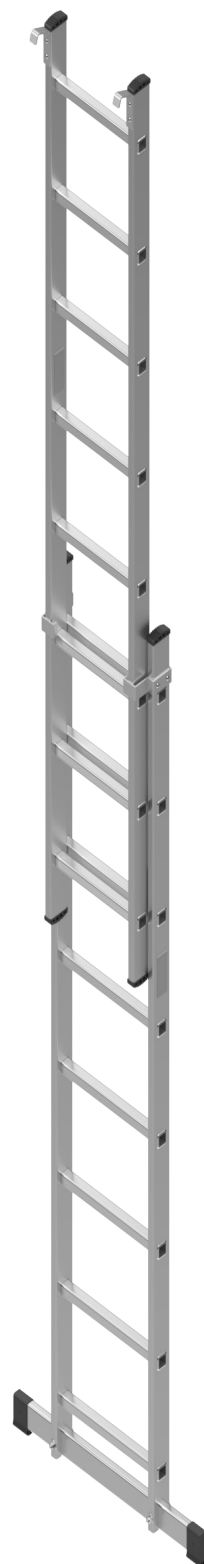


ACCESS ACCESSORIES - EXIT BARS

WALL FIXING



CLAMP FIXING

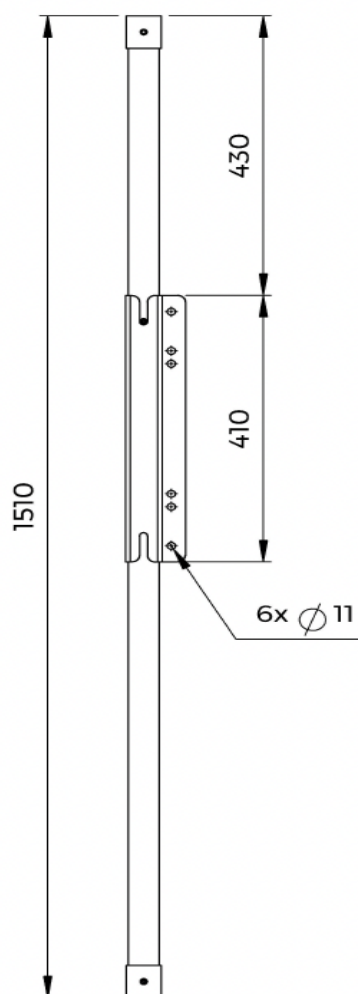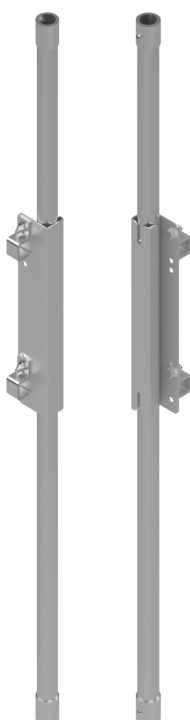

ANCHORAGE POINT FIXING



