

PRODUCT SHEET  
**M-WALK** LIGHT WALKWAY

**INDEX**

<b>INTRODUCTION</b>	<b>3</b>
<b>ADVANTAGES</b>	<b>3</b>
<b>STANDARDS</b>	<b>3</b>
<b>DIMENSIONS</b>	<b>3</b>
<b>FIXINGS</b>	<b>4</b>

### INTRODUCTION

The **M-WALK** Light Walkway is an efficient and cost-effective solution within our range of technical walkways.

Specially designed for roof adaptation, it stands out for its low weight and ease of installation, without compromising safety or resistance.

### ADVANTAGES

- **High strength:** Supports loads up to 250 kg/m<sup>2</sup>.
- **Anti-slip material**, ideal for work at height and demanding conditions.
- **Customizable length**, fully adaptable to the specific requirements of each project.
- **Maximum distance between supports: 1,500 mm.**


This walkway is an ideal option for those seeking a **lightweight, safe, and cost-effective** solution for pedestrian access on industrial or technical roofs.

### STANDARDS

Complies with standards NF E 85-016:2022 and EN 14122-2:2017.


### DIMENSIONS

Standard length 3,010 mm, possibility of unlimited extensions.

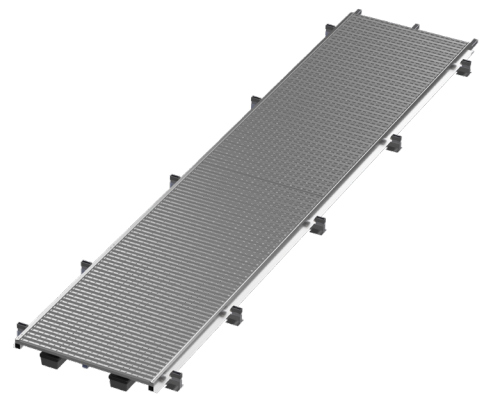


Width	Weight (kg/ml)	Material
600 mm	7,10	6063-T5
800 mm	8,7	6063-T5
1,000 mm	10,2	6063-T5
1,200 mm	11,8	6063-T5

**M-WALK** light walkway profile:

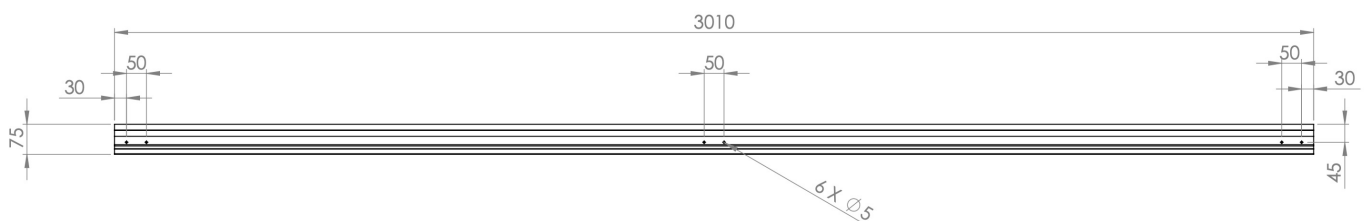


**FIXINGS**


**STEEL DECK FIXING**

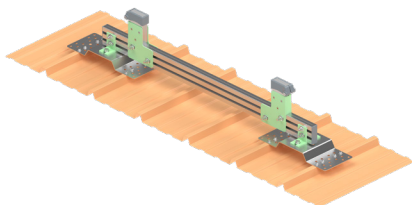

**ADJUSTABLE STEEL DECK  
FIXING (1 SIDE)**

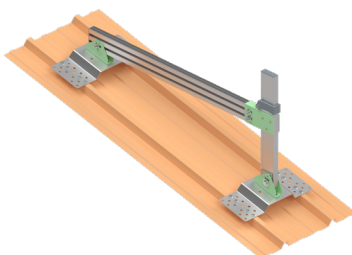


**ADJUSTABLE STEEL  
DECK FIXING (2 SIDES)**

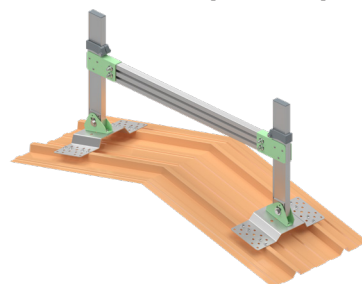


**WALL FIXING**




**COUNTERWEIGHT  
FIXING**

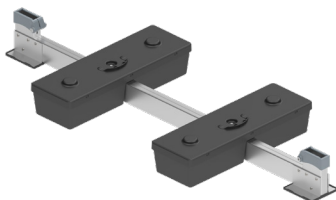


**FIBER CEMENT FIXING**




**ADJUSTABLE FIBER CEMENT  
FIXING (1 SIDE)**




**ADJUSTABLE FIBER CEMENT  
FIXING (1 SIDE)**




**KALZIP FIXING**

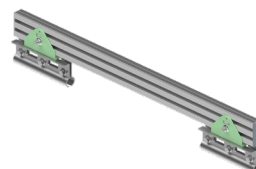


**ADJUSTABLE KALZIP  
FIXING (2 SIDES)**




**ADJUSTABLE KALZIP FIXING  
(1 SIDE)**



**ADJUSTABLE TILE  
FIXING (1 SIDE)**

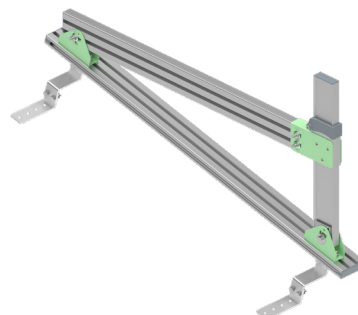

**TILE FIXING**

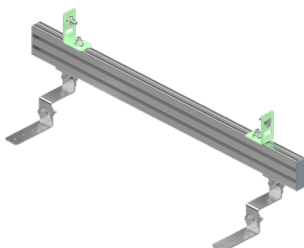

**ADJUSTABLE TILE  
FIXING (2 SIDES)**

