



PRODUCT SHEET

M-WALK HEAVY-DUTY WALKWAY



M-WALK HEAVY DUTY WALKWAY

INDEX

INTRODUCTION	3
ADVANTAGES	3
STANDARDS	3
DIMENSIONS	3
FIXINGS	4



M-WALK HEAVY DUTY WALKWAY

INTRODUCTION

The M-WALK Heavy-Duty Walkway is designed for applications that require greater strength and stability, offering a safe and durable solution for technical transit areas.

Its modular design allows for custom lengths, easily adapting to the client's specific needs.

ADVANTAGES

- Quick and simple installation, with optimized transport thanks to its lightweight design.
- Anti-slip steps ensuring safe passage, even in adverse conditions.
- Suitable for roofs with slopes from 0° to 20°.
- Can be installed on any surface, with a maximum distance between supports of 3,000 mm.

A reliable solution for demanding industrial environments, with a structure built to last.




Complies with standards NF E 85-016:2022 and EN 14122-2:2017.

DIMENSIONS

Standard length 3,010 mm, possibility of unlimited extensions.

Width	Weigth (kg/ml)	Material
600 mm	10	6063-T5
800 mm	11,6	6063-T5
1,000 mm	15,2	6063-T5
1,200 mm	18,1	6063-T5

M-WALK heavy duty walkway profile:

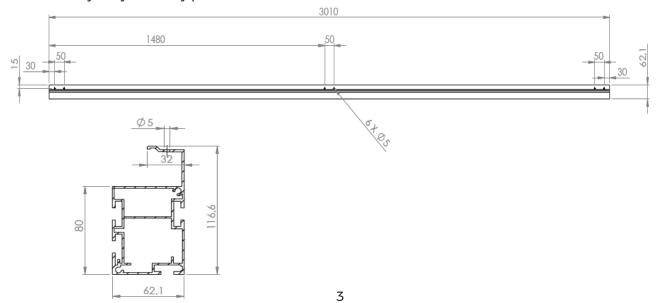




M-WALK HEAVY DUTY WALKWAY



ADJUSTABLE REINFORCED STEEL DECK FIXING (1 SIDE)



ADJUSTABLE REINFORCED STEEL DECK FIXING (2 SIDES)



STEEL DECK FIXING



WALL FIXING



REINFORCED FIBER CEMENT FIXING



ADJUSTABLE REINFORCED FIBER CEMENT FIXING (1 SIDE)



ADJUSTABLE REINFORCED FIBER CEMENT FIXING (2 SIDES)



ADJUSTABLE TILE FIXING



ADJUSTABLE TILE FIXING WITH REINFORCEMENT



ADJUSTABLE REINFORCED KALZIP FIXING (2 SIDES)



REINFORCED KALZIP FIXING



ADJUSTABLE REINFORCED KALZIP FIXING (1 SIDE)



